



# INTERNATIONAL JOURNAL OF PURE AND APPLIED RESEARCH IN ENGINEERING AND TECHNOLOGY

A PATH FOR HORIZING YOUR INNOVATIVE WORK

## REVIEW OF POSITIVE AND NEGATIVE SEQUENCE VOLTAGE COMPENSATION AND RESULTS FOR POSITIVE SEQUENCE VOLTAGE USING STATCOM AT WIND FARM

MOHINI MOITRA

Department of Electrical Engineering, G.H.Raisoni Institute of Engineering & Technology for Women's, RTMNU, Nagpur, India

Accepted Date: 05/03/2015; Published Date: 01/05/2015

**Abstract:** The study of shunt connected devices is a shunt connected field positive and negative sequence voltage compensation and better mitigation of transmission related world. Statcom is a FACTS device whose capacitive or inductive current can be controlled independent of system ac voltage. Whenever a three phase fault occurs in a system, power loss and voltage instability can occur in that system. So to increase the life time of generator drives and to reduce that voltage instability, Statcom can be used. Statcom can compensate positive sequence voltage for improving voltage stability and for reducing torque ripples negative sequence voltage has to be compensated. Statcom can perform coordinated action regarding positive and negative voltage compensation. In this paper review of positive and negative voltage compensation and results for positive sequence voltage using MATLAB simulation is shown.

**Keywords:** Statcom, Wind Farm, PWM Technique, Positive Sequence Voltage and Negative Sequence Voltage.

Corresponding Author: MS. MOHINI MOITRA



PAPER-QR CODE

Access Online On:

[www.ijpret.com](http://www.ijpret.com)

How to Cite This Article:

Mohini Moitra, IJPRET, 2015; Volume 3 (9): 559-568

## INTRODUCTION

In order to achieve renewable energy and CO<sub>2</sub> emission reduction targets, significant amounts of wind energy need to be integrated into Europe's electricity system. State of the art wind power technology with advanced control features is designed to enhance grid performance by providing ancillary services. Using these power plant characteristics to their full potential with a minimum of curtailment of wind power is essential for efficiently integrating high levels of wind power. The wind farms which are recently installed are of variable speed type. Variable speed type generators are of two types, doubly fed induction generator (DFIG) or permanent-magnet synchronous generator. But out of these, still 15% of wind farms works on fixed speed induction generator (FSIG) in Europe in 2010 [3]. Whenever there is a voltage dip in a system, the induction generator may consume a large amount of reactive power because their speed deviates from synchronous speed which can result into progression of faults and voltage collapse [4]. Whenever unsymmetrical faults occur in a wind farm, positive and negative sequence voltages are generated. Positive sequence voltage causes voltage instability and negative sequence voltage causes heavy generator torque oscillations which leads to mechanical vibration. StatCom is a FACTS device that can be used for eradicating positive and negative sequence voltages produced in a wind farm. StatCom is a type of static synchronous generator. It is a device whose capacitive or inductive output current can be controlled irrespective of its ac voltage [1]. For different output power distributions, StatCom may be applied by different current injection methods based on symmetrical components [16]. The main aim of using StatCom in a transmission network is the fast regulation of voltage at a load or an intermediate bus. Available transfer capacity (ATC) and power transfer capacity can also be increased with the help of application of StatCom [2]. For stabilization of fixed speed generator system, different efficient methods can be used. Some of them are StatCom, pitch control system, braking resistor (BR) and superconducting magnetic energy storage (SMES). Out of these methods, StatCom has been identified to provide the best dynamic stability enhancement capability [5]. After comparison with various converter topologies, the chain converter is found to be most attractive choice for implementation of static compensator (StatCom) [6]. By comparing various parameters of StatCom and SVC, it is found out that StatCom has low losses, better performances, improved wind farm stability and better reactive power support to network [7-10]. Double fed induction generator has many advantages over fixed speed induction generator [11]. The degree up to which the StatCom can compensate the voltage depends largely on the choice of current rating of StatCom and impedance of power system. If power system is weak and high current rating is applied to StatCom then capability of voltage compensation of StatCom is also increased [12]. While designing and dimensioning

machines and converters, negative sequence voltages and currents resulting from system faults have to be considered as they cause oscillating torques and damping which may structural load to gear box as well as drive train [13]. In DFIG if there is condition of unbalanced grid voltage, then the major problem are the dc voltages ripples in the back to back VSCs and torque pulsations [15].

- **PROBLEMS IN WIND FARM INTEGRATION WITH GRID**

FACTS technology plays a vital role in enhancing the power system performance and improving the stability and life span of the system. The installations must meet requirements of the grid connection codes such as fault ride through capability [8], voltage control and frequency range and control. Induction generators are used for fixed speed operation. The main drawback is that the grid has to supply power to load, lines and also the generator. It is therefore essential to meet the variable VAR requirements within the wind farm locality. After the occurrence of fault conditions, the IG draws more reactive power from the grid and the voltage stability will be impossible, due to which there will be voltage collapse at the terminals [4]. During a grid fault, the wind farms can be disconnected from the grid and again connected when normal conditions have regained. The integration of wind farm with electrical system has been started to influence the overall power system. Wind being the climatically uncontrolled resource as wind flow varies according to climate, it is very necessary to reduce the problems occurring in the integration of wind farms with grid.

- **POSSIBLE REMEDY IS STATCOM**

STATCOM is a power electronics revolution which offered advantages of high speed, reliability of switching and enhanced the value of electric energy. The ability of STATCOM to increase available transfer capability, smoothing reactive power, improve reliability and to enhance operation and control has made it a correct choice for solving installation problems. STATCOM prevents large deviations of bus voltage magnitude induced by reactive power drawn from grid during an external fault [1]. It is faster, smaller. It has better performance at low voltage conditions. To reduce voltage instability and torque ripples on integrating wind energy into grid, a STATCOM control mechanism is preferable. Harmonic part of the load current and voltage can also be eliminated or reduced by STATCOM. STATCOM can improve the voltage profile at the PCC during faults by regulating the reactive power of the grid. It maintains the level of voltage sag so that the turbine can be continuously connected to the grid. Adequate reactive power compensation, optimum design of wind turbines can play a vital role in minimizing the voltage instability and increasing life span of generator drives [3].

- PRINCIPLE OF OPERATION OF STATCOM

A StatCom is shown in fig.1 as below. A static synchronous compensator (StatCom) is also called static synchronous condenser. It is member of FACTS family of devices. It is type of regulating device which is used on alternating current electricity transmission networks. StatCom can operate as either a source or sink of reactive AC power to an electricity network and the basis of this device is power electronics voltage source converter [3]. It is modular and electable. StatCom is installed in a wind farm in order to improve power factor and voltage regulation therefore StatCom can be used for voltage stability. The active power capability of StatCom is very less. Therefore if an appropriate energy storage device is inserted across DC capacitor then its active power capability can be improved. The response time of StatCom is less than SVC. Better reactive power support at low AC voltages can be provided by StatCom. To improve power flow and transient stability in power grids StatCom is used which works on power electronics devices. StatCom generates reactive power if system voltage is low and it absorbs reactive power if system voltage is high [2].


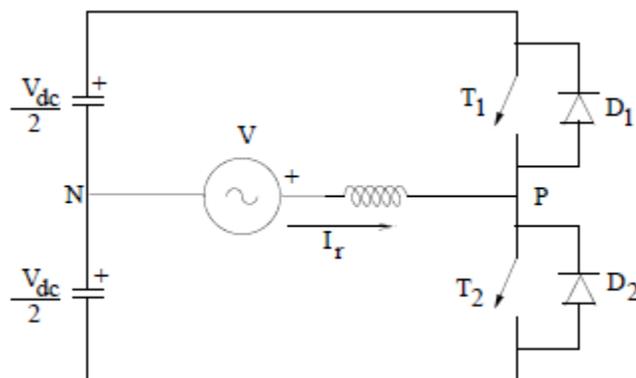


Fig. 1 A single phase StatCom

The principle of operation of StatCom is shown in below fig. 2. In this figure power transfer between active and reactive power between source V1 and V2 is shown where V1 is system voltage to be controlled and V2 is voltage generated by VSC.

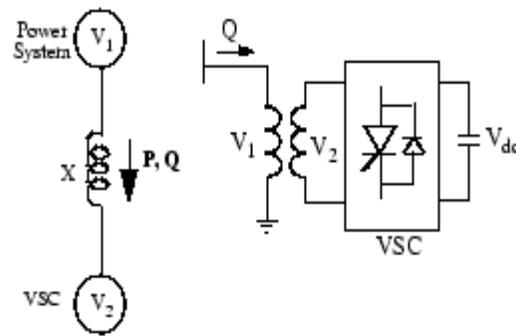

**Fig. 2 Principle of operation of StatCom**

$$P = (V_1 V_2) \sin \delta / X$$

$$Q = V_1 (V_1 - V_2 \cos \delta) / X$$

$V_1$  = Line to line voltage of source 1.

$V_2$  = Line to line voltage of source 2.

$X$  = Interconnecting transformer and filters reactance.

$\delta$  = Phase angle of  $V_1$  with respect to  $V_2$ .

At  $\delta = 0$ ,  $V_2$  is in phase with  $V_1$  and therefore only reactive power flows. This is the condition during steady state.

If  $V_2$  is less than  $V_1$  then StatCom will absorb reactive power. If  $V_2$  is greater than  $V_1$ , the StatCom will generate reactive power.

Reactive power is

$$Q = (V_1(V_1 - V_2)) / X$$

A capacitor connected on the DC side of the VSC acts as a DC voltage source. In steady state the voltage  $V_2$  has to be phase shifted slightly behind  $V_1$  in order to compensate for transformer and VSC losses and to keep the capacitor charged.

- PWM TECHNIQUE USED IN STATCOM

Sinusoidal PWM technique:-


Fundamental line to line converter voltage is controlled by sinusoidal PWM technique. The three phase converter voltage can be obtained by comparing sinusoidal voltage waveform with triangular voltage waveform. The modulating frequency is equal to the supply frequency in StatCom. The Amplitude modulation ratio is given by,

$$m_a = V_{\text{control}} / V_{\text{tri}}$$

Where  $V_{\text{control}}$  is the peak amplitude of the control voltage waveform and  $V_{\text{tri}}$  is the peak amplitude of triangular voltage waveform. The range of SPWM is  $0 \leq m_a \leq 1$ . The Dc link voltage value is regulated by StatCom to a fixed one in all modes of operation in constant DC link scheme. The peak StatCom fundamental voltage from full inductive mode of operation to full capacitive mode of operation at minimum and maximum voltage value determines this fixed value. So for  $0 \leq m_a \leq 1$ , the fundamental voltage is varied by varying  $m_a$  in the linear range.

- SYSTEM CONFIGURATION AND CONTROL MODEL OF STATCOM

The block diagram of the system and control model is shown in below fig. 3. The control scheme used for StatCom control structure is voltage oriented vector control method. The wind farm structure consists of StatCom, transformers, transmission lines and grid lines. The StatCom is coupled with transformers in order to compensate positive and negative sequence voltages. The sinusoidal pulse width modulation is applied to StatCom control model. The sinusoidal pulse width modulation consists of adder circuit and gate devices [15]. The gate devices are triggered by triggering pulses and adder circuit provide signals to in SPWM model. In this control structure with inner proportional integral (PI) current controllers, grid voltage orientation is in a rotating d-q frame [4].

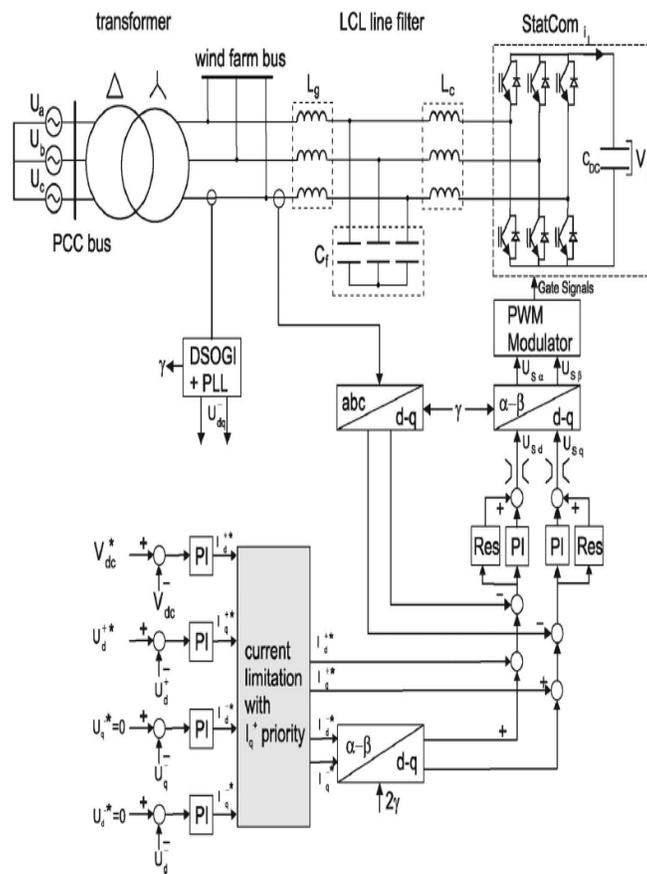

**Fig. 3 System configuration and Control structure of StatCom**

• CALCULATIONS OF SEQUENCE VOLTAGES

POSITIVE SEQUENCE VOLTAGE

Positive sequence voltage is shown below in fig.3. Positive sequence voltage is calculated as follows:-

$$E_{r1} = (E_r + aE_y + a^2E_b) / 3$$

NEGATIVE SEQUENCE VOLTAGE

Negative sequence voltage is shown below in fig.3. Negative sequence voltage is calculated as follows:-

$$E_{r2} = (E_r + a^2E_y + aE_b) / 3$$

Where

$E_r$  is the voltage across r phase.


$E_y$  is the voltage across y phase.

$E_b$  is the voltage across b phase.

a is the unit vector.

- SIMULATION RESULTS

Simulation results show the positive voltage compensation after occurrence of fault. Compensation of positive sequence voltage can be useful for improving system stability. Compensation is done by using available STATCOM current using PWM techniques. The graph below shows the positive sequence voltage compensation.

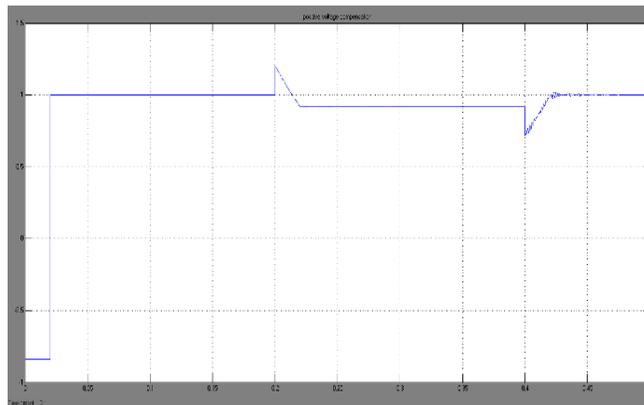

**Fig. 4 Results for positive voltage compensation**

- ACKNOWLEDGMENTS

I would like to show my sincere gratitude to project guide Prof. S.S. Mahajan for helping me in this project. I would also like to thank my father Mr. Amit kumar Moitra and my mother Mrs. Smriti Moitra for their love and support and for always with me while completing this project. And at last I would like to thank my sister Miss Vaishali Moitra for being a mental support to me always.

## REFERENCES

1. Narain G. Hingorani and Laszlo Gyugyi, "Understanding FACTS-Concepts and Technology of Flexible AC Transmission System," New York, IEEE Press 2000
2. F. Van Hulle and N. Fichaux, "Powering Europe: Wind energy and the electricity grid," Eur. Wind Energy Assoc., Brussels, Belgium, Nov. 2010.K.
3. K.R.Padiyar, "Facts controllers in power transmission and distribution," New Age International (P) Ltd., 2007.
4. Christian Wessels, Nils Hoffmann, Marta Molinas and Friedrich Wilhelm Fuchs "StatCom Control at Wind Farms With Fixed-Speed Induction Generators Under Asymmetric Grid Faults" IEEE Trans. Ind. Electron., VOL. 60, NO. 7, JULY 2013.
5. M.Ali and B.Wu, "Comparison of stabilization methods for fixed speed wind generator systems," IEEE Trans. Power Del., vol. 25, no.1 pp,323-331,Jan. 2010.
6. Diego Soto and Tim C. Green, "A Comparison of High-Power Converter Topologies for the Implementation of FACTS Controllers," IEEE Transactions on industrial electronics, vol. 49, no.5, October 2002.
7. J.Suul, M. Molinas and T. Undeland, "STATCOM based indirect torque control of induction Machines during voltage recovery after grid faults," IEEE Trans. Power Electron., vol.25, no.5, pp.1240-1250, May 2010.
8. Omar Noureldeen, "Low Voltage Ride through Strategies for SCIG Wind Turbines Interconnected Grid," International Journal of Electrical & Computer Sciences IJECS-IJENS vol: 11 No: 02 53, April 2011.
9. M. Noroozian, N Petersson, B. Thorvaldson, Bo A. Nilsson, C.W. Taylor, "Benefits of SVC and STATCOM for Electric Utility Application," IEEE Conference. [Transmission and Distribution Conference and Exposition, 2003 IEEE PES](#), vol.3, pp 1143 – 1150, Sept. 2003.
10. M. Sedighzadeh, A. Rezazadeh and M. Parayandeh, "COMPARISON OF SVC AND STATCOM IMPACTS ON WIND FARM STABILITY CONNECTED TO POWER SYSTEM," International Journal of Engineering and Applied Sciences (IJEAS) Vol.2, Issue 2, pp.13-22, 2010.
11. Heng Nian, and Yipeng Song, "Direct Power Control of Doubly Fed Induction Generator Under Distorted Grid Voltage," IEEE TRANSACTIONS ON POWER ELECTRONICS, VOL. 29, NO. 2, FEBRUARY 2014

12. Balaji K , Madhusudanan G, “Modelling and Performance Analysis of a STATCOM Control for Induction Generator Based Windfarm under Unbalanced Loads,” International Journal of Engineering and Technical Research (IJETR) ISSN: 2321-0869, Volume-2, Issue-1, January 2014.
13. S. Engelhardt, J. Kretschmann, J. Fortmann, F. Shewarega, I. Erlich C. Feltes, “Negative Sequence Control of DFG based Wind Turbines,” IEEE conf. Power and Energy Society General Meeting, pp. 1 – 8, July 2011.
14. Yi Zhou, Paul Bauer, Jan A. Ferreira and Jan Pierik, “Operation of Grid-Connected DFIG under Unbalanced Grid Voltage Condition,” IEEE TRANSACTIONS ON ENERGY CONVERSION, VOL.24, NO. 1, MARCH 2009.
15. Kanakarathinam.P, Manikandan.M, “Real and Reactive Power Compensation in Wind Farms by Static Synchronous Compensator,” IJIRSET, International Conference on Engineering Technology and Science-(ICETS’14), Volume 3,Special Issue 1, February 2014.
16. P. Rodriguez, G. Medeiros, A. Luna, M. Cavalcanti, and R. Teodorescu, “Safe current injection strategies for a STATCOM under asymmetrical grid faults,” in Proc. IEEE ECCE, Sep. 2010, pp. 3929–3935.
17. Surekha Manoj, Puttaswamy Palahalli Srinivasaiah, “Improvement of Power Quality of Grid Integrated Wind Distributed Generation by STATCOM,” International Journal of Engineering and Advanced Technology(IJEAT),Volume-2,Issue-2,December 2012