



# INTERNATIONAL JOURNAL OF PURE AND APPLIED RESEARCH IN ENGINEERING AND TECHNOLOGY

A PATH FOR HORIZING YOUR INNOVATIVE WORK

## HELICOPTER MOUNTED ARTICULATED OPTICAL DAY SIGHT FOR ACQUIRING COMBAT TANK TARGETS

RAO PN<sup>1</sup>, SHRIVASTAVA SK<sup>2</sup>, LIKHITHA CH<sup>3</sup>, NAGAMANI R<sup>4</sup>

1. Retired Scientist ,Research Centre Imarat, Hyderabad, AP– 500069, India
2. Department of Physics, Bundelkhand University, Jhansi, UP - 284128, India
3. MLR Institute of Technology, Hyderabad-5000043, India.
4. National Institute of technology, Warangal, TS-506004, India.

Accepted Date: 08/11/2014; Published Date: 01/12/2014

**Abstract:** An optical design data of helicopter mounted optical day sight for day use in the wave length range of 350nm to 700nm is presented .The 9.85 x day sight is designed for 40 mm entrance pupil diameter and covers a full field of view of 4 x 6 degrees. The length of the sight is 1164mm. The clear apertures of optical elements of sight are equal to and less than the entrance pupil diameter of sight .The day sight optics includes main objective, collimating lens, double Dove, reversed Galilean telescope, imaging lens, Pechan prism , two relay lenses Penta prism and an eyepiece. The sight is fivefold day sight with folds in all the three Cartesian axes using front coated plane optical mirrors and a Penta prism. The sight is configured for maximum overall transmittance with single layer antireflection coating and ease of alignment. The sight configuration is entirely a novel complex optical configuration for improves illumination in image plane .. The on- axis transmittance of the sight is 25% and the off- axis transmittance is 60% of on- axis The sight occupies the space above the helicopter roof and below the roof.. The portion of the optical sight above the helicopter roof rotates from +120 deg to -120 deg in azimuth to sweep across the distant tank targets in azimuth and the head mirror scans the distant tank targets in elevation with articulation angles from +20 to -10 deg. The sight occupies a volume space of 550mm x 300mm x200mm. The sight acquires and recognizes the 2.7m X 2.7m X5.3 m tank targets of 10% contrast at a range of 4000 meters in all ups and downs of Indian terrain. The maximum diameter of mechanical tube that holds the optical elements of day sight is 45.0mm.

**Keywords:** Helicopter mounted articulated optical day sight, optical design, complex optical sight, optics folded in three Cartesian axes.

Corresponding Author: DR. P. NAGESWARA RAO



PAPER-QR CODE

Access Online On:

[www.ijpret.com](http://www.ijpret.com)

How to Cite This Article:

Rao PN, IJPRET, 2014; Volume 3 (4): 41-59

## INTRODUCTION

The optical day sights are popular as rifle sights, light machine gun sights, heavy machine gun sights in small arms, military tank periscopes and ship periscopes with parallax errors 40 arc seconds and less.. These day sights have improved performance in regard to target acquisition capability. This results from the larger field of view and resolution attainable with the direct view optical sights. The human eye accommodation in direct view sights provides dynamic focusing for targets at different ranges thereby optimizing the resolution of these targets. A focusing mechanism is hardly optical required in these systems to optimize the resolution of targets at different target ranges..This results in reaction time of observer in mille seconds of time without degrading the resolution and without degrading the recognition/ identification performance. The optical day systems provide color clues, different depth perception clues such as parallax and eye accommodation for military objects at different distances These clues are significant for target ranges up to 5 kilometers and relatively insignificant for target ranges beyond 5 kilometers. These systems are optical a focals with a graticule / reticle in objective image plane in few systems and in majority of optical systems ,grticule/ reticle is placed in the eyepiece object plane.. In patients and text book articles many optical schemes with regard to day optical systems are given. They only describe the different configurations of optical day sights which remain incomplete because the optical design data is not given to assess the potential of configurations in terms of performance, weight, length and volume space I have not been able to find a optical schematic and design data of optical day sight which is folded in all the three Cartesian coordinate directions in optics literature. The optical characteristics of optical day sight are shown in table1.

**Table 1 : Optical day sight parameters**

parameter	Value
Magnification	9.85X
Field of view (contributed by ,recognition range of target)	4 <sup>0</sup> x6 <sup>0</sup>
Exit pupil diameter (Eye pupil diameter in day light)	4.0 mm

Eye relief >12.0mm

**Entrance pupil diameter**

(contributed by the illumination requirements of image seen through the sight, 10% contrast tank target of size 2.7mx27.7mx1.7m and 4000m range ( )

40.0 mm

elevation line of sight/articulation +20 deg to -10 deg

azimuth line of sight/articulation +120 deg to -120 deg

(contributed by the ups and downs of the Indian terrain)

Volume space of the sight 430.0  
 mmX239.0mmX252.0mm

+ The field stop is located in reticle plane of day sight.

**1. System design of day sight**

Human eye that sees a distant targets or an eye that receives collimated light beam is a relaxed human eye .The relaxed eye shall see the images of distant targets without any fatigue to the eye for longer periods of time. This makes the pilot of a combat helicopter uses a telescopic direct view day sight for continuous observation of combat tanks on all ups and downs Indian terrains. A narrow field telescope is rotated continuously for pointing the optical sight for all line of sight angles of the targets in the desired azimuth and elevation ranges. and thus tank targets are observed on all ups and downs of terrain This kind of articulation of sight continuously vary the orientations of images of targets seen through the sight. The orientations of images are restored to the true orientations of the targets using image rotation compensation optical prisms called rhomboidal or Dove or Pechan prisms. For these requirements, a first order optical layout is prepared for direct view day sight for combat helicopter application. The simple day sight have objective, an erector and an eyepiece which are generally accommodated in a length ranging from 250 mm to 300 mm. The articulate day sights have lengths from 1000mm

to 3300 mm depending on type of combat helicopter. Transfer of images of external targets to the pilots eye over lengths of 1164.0 mm in the present case requires the use of more than one relay optics in the day sight.. A general practice in optical design of day sights is that Dove prism is used for image rotation compensation in elevation and Pechan prism for image rotation compensation in azimuth. Articulation in convergent and divergent light shall increase the lateral dimensions of the sight. With this reason, a Dove prism is preferred in collimated light beam and Pechan prism is in a convergent or divergent light beam. Thus the elevation articulation is planned in parallel light and the articulation in azimuth in convergent light.. The recognition of military tank target of size 2.1 m x2.1m x 5.3m and 10% contrast at a range of 4000 meters require an optical magnification of 10 x , an entrance pupil diameter of 40.0mm and a full field -of -view of 4 deg x6deg. The sights designed earlier with 40.0 mm entrance pupil diameter acquired combat military targets at a range of 4000meter in Indian terrains in all day light conditions. The volume space constraint of day sight is fulfilled with a reasonable number of folds of optical path in all three Cartesian coordinate directions. The entrance pupil diameter of human eye is taken as 4.0 mm which gives the maximum resolution of eye in day light conditions. With the above conclusions, an optical lay -out of optical sight for helicopter mounting for day use is made with different alternatives. The most general lay –out includes an objective. Three numbers of relay stems and eyepiece combination in a focal form .But this has increased the diameters of some optical components in the sight larger than 45 mm requirement which is not acceptable for the present r application. The second option is a combination a focal systems with different magnifications. Each a focal system contains an erector lens and the diameters of erector lenses exceeded the acceptable diameter of 45.0 mm. The inevitable use of Dove and Pechan prisms , length of the sight, day light illumination levels in Indian conditions, minimum diameters for optical components for day sight in mind , an optical layout is engineered using main objective lens , collimating lens , Galilean a focal, imaging lens, two relay systems ,graticule and an eyepiece which restricted the diameters of all optical elements of the sight to within 45.0 mm for a wave length range 350 nm to 700nm and shown in figure1.The folded optical path of day sight mounted in the pilot position in a typical tank target acquisition helicopter roof is shown in figure 2 . This lay-out of the day sight is folded in three Cartesian coordinate directions using front surface coated mirrors and a Penta prism. The transmittance of day sight is the most important parameter and this parameter qualifies day sight for acceptance .. The minimum transmittance required for any day use sights is 10% on off –axis and 20% on-axis with single antireflection coating on all the optical surfaces of optical components . Absorption by optical glasses of lenses in sight , scattering from optical surfaces of sight ,Fresnel reflection loses from optical components of sight ,cos4 loss contribute to the overall transmittance of sight. Single elements contribute to more Fresnel losses

compared with doublet elements. It is preferable to use more number of doublet lenses and less number of single lenses to improve the overall transmittance of sight. The absorption loss of the sight is controlled through thickness of the optical components. Thicker the optical component larger the absorption loss.

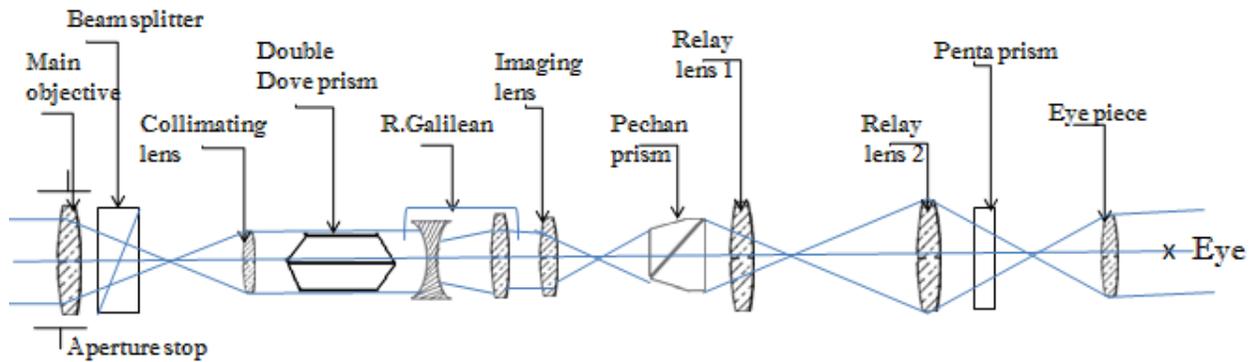


Figure 1: The first order optical lay-out direct view optical (DVO) sight

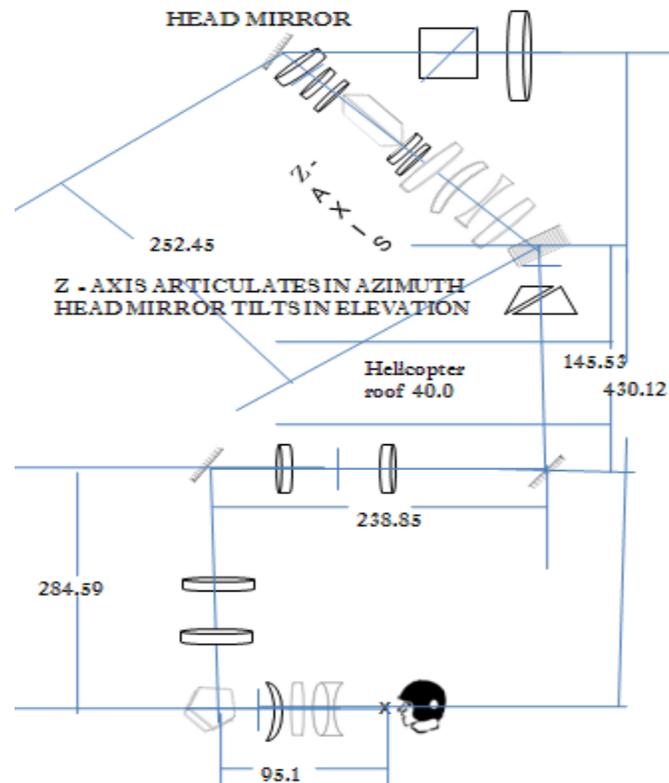


Figure 2: The optical layout of the helicopter mounted articulated optical day sight for acquiring combat tanks and physical dimensions of day sight.

Figure 2: Left side view of day sight mounted in the pilot position in a typical tank target acquisition helicopter roof and a tank target

## 2. Configurations of main objective, collimating lens , imaging lens , relay lenses and eyepiece

### Configuration of main Objective of day sight

The two doublet Petzval configuration covers a large aperture of  $f/2.0$  and field of view up to  $10.0$  deg. at longer focal lengths. The available focal lengths in Petzval objectives range up to  $1000$ mm. The length of the Petzval is  $1.5$  to  $1.9$  times the focal length and this can be viewed as an advantage; considerable length of sight covered by Petzval itself. The zonal spherical aberration and coma of Petzval lens is small compared with other telescope objectives. This results in parallax errors less than  $40.0$  arc seconds depending on the coma at  $0.7071$  zone. Another advantage of Petzval lens is the wide air space available between two doublets which can be used to accommodate optical mirror for folding the optical path of the sight or to accommodate beam splitter in between to integrate day sight with a laser range finder / laser designator in future. These advantages lead to the preference of Petzval objective configuration for the main objective of the day sight. In the context of day sights, Petzval configuration for main objective outsmarts all other telescope objective configurations.

### Collimating lens

The collimating lens covers an apparent field of  $60$  degrees. The collimating lens is a two cemented doublet system. The length between first vertex to back focus is only  $60.12$ mm.

### Imaging lens

The imaging lens is a single lens four element lens system. The configuration is two closely spaced positive, negative menisci followed by widely spaced biconcave and biconvex lenses. The configuration is not a conventional one and a novel configuration is adopted for imaging lens. The vertex to vertex length of imaging lens is  $57.37$ mm.

### Two Relay systems 1 and 2

Each relay is a widely spaced two cemented doublet configuration and designed for long finite conjugates. The Pechan prism is accommodated in the image space of the first relay. The long conjugate relays are configured for day sight so that optical plane mirrors are accommodated in conjugate spaces for folding of sight

## Eyepiece

The eyepiece is configured with a positive meniscus field lens, biconvex lens middle and a cemented doublet eye lens. The focal length of eyepiece is 20.0 mm The vertex to vertex length of eye piece is 21.38 mm.

## Image compensation optical components

The portion of day sight mounted on roof of the helicopter rotate to sweep the distant targets in azimuth and the head mirror rotate in elevation to sweep the distant targets. These rotations cause image rotation in both azimuth and elevation of image. Image rotation compensation is one of the fundamental requirements in day sights. It is decide to compensate the image rotation in elevation using Dove prism. Double Dove prism is preferred over single Dove prism to reduce the length of prism as well as to double the clear aperture of prism to meet the axial and off- axis beam diameters in the sight. Pechan prism corrects image rotation in azimuth.

## Optical Design of optical sight

The five monochromatic aberrations namely spherical aberration ( change of on  $-axis$  focus with aperture ), coma(change of magnification with aperture), astigmatism(distance between sagittal focus and tangential focus ), Petzval curvature( basic field curvature of image for straight line object), distortion (image height less than  $f \tan \Theta$  which is pin cushion distortion and image height more than  $f \tan \Theta$  which is barrel distortion) , two color aberrations that is longitudinal chromatic aberrations( change of focus with wavelength) and lateral color( change image height with wavelength), longitudinal secondary spectrum( longitudinal movement of image with wave length), lateral secondary spectrum(lateral movement of image with wavelength)are corrected by altering the lens parameters in optical system. Power distribution of lenses in the system and air separation between lenses quantify the amount of Petzval curvature whether it is small or large which is inevitable. The other four monochromatic aberrations depend on powers of individual lenses, lens shapes and air spaces between individual lenses and stop position. The two color aberrations depend on individual powers of lenses, air spaces among them,  $V$  - numbers of optical glasses used for lenses and refractive indices of lenses .Glass pairs with a large  $V$  -difference and large air spaces in doublet lens exhibit negligible longitudinal chromatic aberration (Lch).Glass pairs that have small  $V$ - difference rapidly introduce large amount of longitudinal chromatic aberration..The glass pair of equal  $V$  -number difference raising the refractive index of positive lenses in the doublet lenses reduce longitudinal chromatic aberration is relatively unaffected by transverse color in optical system Hence reduction of Lch can be accomplished in the doublet lens by increasing the  $V$ - number difference between two glasses

or by raising the refractive index of the positive lens to as high a value as possible. Instead of choosing a zero lateral color, it is found desirable to choose a solution with a little positive lateral color at the center of the field in order to compensate the negative higher order lateral color at the outer part of the field. Lateral color may be further reduced if the lens system is slightly over corrected for axial color. A Seidel analysis of lens system is quite instructive on the choice of lens shapes in systems whether it is objective or eyepiece or relay lens to be made between various lenses. In setting limits for these aberrations the criteria is used on the resolving power of the human eye namely 1 or 2 minutes of arc and the magnification of sight is chosen for this resolution, The distortion can be taken care in the sight by a suitably designed reticle for the sight. For infinite focal length system like a day sight in the present case, Petzval curvature of sight at field angles is eliminated with proper magnitudes of astigmatism in eyepiece and other lenses. The aberrations due to tilt and de-center of optical components in the sight are brought to tolerable limits so that rays in object space and image space are parallel and direction of distant object in object space is identical to the direction image in image space, the two main properties of afocal day sight are retained. An aperture stop in between objective and eyepiece increases the diameters of optical elements of sight.. As the field of view requirement of day sight in object space is 6 degrees, it is decided to locate the aperture stop on the main objective of day sight to reduce the lens diameters of optical components which follow the objective. All most of all lenses in the sight are brought as close as possible or edge contacted for minimum aberration contributions and minimum vignetting which improve the illumination in image plane. The sight is designed for 6 degrees circular field of view. A rectangular field stop in the reticle provides a 4 deg x 6 deg field of view in the object space of day sight.. When a field stop is in the image plane, the exit window lies on the stop itself and the entrance window coincides with distant object in all visual instruments like day sights[1,2].

### Aberration correction of day optical sight

The a brief description of aberration correction of and the entire optical characteristics of sight is shown as optical characteristics of two different optical assemblies along with their optical design data This provides complete optical characteristics of subsystems in the optical sight, number of optical elements in the sub systems, number of sub systems in the sight, components for folding optical path and the number of folds in x-, y- .z- Cartesian coordinate directions. The day sight is an afocal system. The focal length of afocal is infinity and power is zero. The entrance and exit pupil positions of afocal is totally different from objective, collimating lens. imaging lens, two relays and eyepiece. For this reason, objective, collimating

lens. imaging lens, two relays and eyepiece are treated as Independent subsystems and designed for desired tolerances[3-5]. Then objective, beam splitter, collimating lens. Dove prism, Galilean afocal, imaging lens, two relays, Pechan prism and reticle together treated as one optical assembly 1 and corrected for aberrations. The optical assembly 2 consists of eye piece only.

### **Aberrations Dove and Pechan prisms**

The prisms are represented by thick plane parallel optical glass plate in optical design. The Dove and Pechan prisms are tilted thick glass plates. The aberrations of these prisms are equivalent to aberrations of thick negative lens. All the aberrations of prisms are negative in sign. The aberrations of Dove prism is compensated by imaging lens whereas the aberrations of Pechan prism is compensated by first relay lens.

### **Optical design of optical assembly1**

The beam splitter is added in the optical assembly1 for integrating laser range finder and laser designator later. The aperture stop is placed on first surface of objective. The Dove prism, Pechan prism, reticle along with the independently corrected sub systems which are objective, collimating lens., Galilean a focal, imaging lens, two relays are assembled in to an optical assembly1. In the initial stage of Seidel aberration corrections, the optical assembly1 calculated. The optical surfaces in optical assembly 1 that contributed to large Seidel values are identified and the sub systems that contained these optical surfaces are redesigned for five Seidel monochromatic aberrations and two Seidel chromatic aberrations. The process is repeated until the individual Seidel surface contributions are low and aberrations of each sub system is within the desired limits. Again optical assembly1 is formed with these subsystems and the Seidel aberrations of optical assembly1 is brought to desired limits by the repeated correction of subsystems for aberrations.. The trigonometrical ray tracing is performed on the optical assembly1 for actual aberrations. Until the actual aberrations are within the limits, Seidel aberration corrections of subassemblies and optical assembly1 are repeated. Thus the optical assembly1 is qualified for Seidel and actual aberrations and actual aberrations as well.[6]

### **Optical design of optical assembly2**

The optical assembly2 is only eyepiece. In a eyepiece design, the aberrations are controlled either by bending technique or appropriate matching with associated with optical assembly2. As the focal length of eyepiece is small, there is high concentration of positive power. Moderate control on Petzval sum exists for eyepiece configuration. Large Petzval sum is neutralized by

introducing over corrected astigmatism but too much of this , of course badly blur the image at extreme field angles[7,8]. The compromise is the designer who must consider the end use of day sight. Eye does not significantly notice sagittal curved image which lie within 1.0 diopter of the central focus, and the images will be reasonably defined over the field. In the absence of astigmatism , a young observer can focus on the edge of the field angle and accommodated about 3.0 diopters for the central field, although the outer portion of the field will swim considerably as the eye is moved about in the field. A flat tangential field combined with a 3.0 diopter of sagittal field image will just about correspond to the largest astigmatism that can be tolerated by the eye; in this case the outer field is useful only for identifying the presence of a possible target. Young or old observers can observe 3.0 diopter of sagittal field curved image comfortably with an ocular focusing (diopter setting ) of 0 diopter on -axis and -2.0 diopters at extreme field . r. The detailed design of these lenses require large space in this article .the correction of aberrations is discussed in their usual order.

- **Spherical aberration**

The telescope objectives and photographic objectives are corrected for under corrected spherical aberration. The under corrected spherical aberration is difficult to control in wide angle lenses like eyepiece, collimating lens and imaging lenses. And may be possible to a minor extent. This is because of short focal lengths small pupil size involved with these lenses .. The actual spherical aberration is small in these lenses and in most cases undetectable and amounting to a few length of a millimeter. A slight over correction of spherical aberration in preceding lenses can compensate easily for these lenses.

- **Coma.**

A monocular eye piece is used in day sight. The f- number of collimating, imaging lens and eyepiece is very large. Coma in these lenses are compensated by bending technique and appropriate matching with the associated lenses preceding to eyepiece.

- **Astigmatism and field curvature.**

Moderate control of Petzval sum exists for eyepiece because of short focal length. The astigmatism and field curvature are compensated together. The optimum amount of over corrected astigmatism of preceding lenses balance these aberrations in eyepiece. The bending techniques that usually used for correction of spherical aberration and coma in telescope objectives and photographic objectives are used for eyepiece to correct astigmatism to the desired limit.

- **Distortion**

This aberration is compensated in eyepieces by the preceding lenses and the balance distortion amount is accepted as it turnout. Later this balance distortion is compensated in the reticle design of the day sight.

- **Lateral color**

This is the most important aberration in eyepieces in setting the configurations of eyepieces. The grouping of individual lenses in these lenses involves positive elements of a low dispersion and negative lenses of high dispersion So that lateral color compensation is achieved. For telescope objectives, the compensation is for longitudinal chromatic aberration and the lateral color is relatively unimportant. For wide angle lenses like eyepieces the reverse is true. However the presence of higher order effects make the procedure of designing eyepieces more complex A satisfactory solution for aberrations in eyepiece is obtained using proper V- number values for positive and negative lenses in eyepiece. The aberration corrections of optical day sight are shown in the Table 2.

**Table 2: Aberrations at the end of day sight Trigonometrically ray trace**

Aberration	System minus eye piece	Tolerance	Eye piece	Tolerance	Total aberration at the end of day sight	Aperture / field
spherical aberration	-0.022257	+0.126043	+0.140560	+0.125782	+0.118303	Full aperture
	+0.109399	+0.188502	+0.070178	+0.188842	+0.179577	0.7071 aperture
OSC'	+0.002271	+0.002500	+0.002219	+0.002500	+0.000052	Full aperture
	-0.000751	+0.002500	+0.001110	+0.002500	+0.001861	0.7071 aperture
Lch	-0.389306	+0.126043	+0.052150	+0.125782	-0.337156	Full aperture
	-0.174979	+0.000000	+0.053133	+0.000000	-0.121846	0.7071 aperture
X <sub>s</sub>	+1.482606	+0.764420	+0.4088909	+0.764761	+1.891515	Full field
	+0.778110	+0.764420	+0.213211	+0.764761	+0.991321	0.7071 field
X <sub>t</sub>	-0.167197	+0.764420	-0.87500	+0.764761	-1.042197	Full field
	-0.407258	+0.764420	-0.453177	+0.764761	-0.860435	0.7071 field
X <sub>t</sub> -X <sub>s</sub>	-1.649803	+0.764420	-1.283909	+0.764761	-2.933712	Full field
	-1.185368	+0.764420	-0.666388	+0.764761	-1.851756	0.7071 field
CDM	+0.006899	+0.002500	+0.007902	+0.002500	-0.001003	Full field
	+0.010512	+0.002500	+0.009536	+0.002500	+0.000976	0.7071 field
DIST	9.9%	5.0%	6.5%	5.0%	3.4%	Full field
	5.0%	5.0%	3.5%	5.0%	1.5%	0.7071 field

- Eye resolution is 5lines/ millimeter at 2 minutes of visual acuity The depth of focus of eye is 0.040millimeter.the relaxed eye sees the distant target. Visual latency of eye in day light conditions are 200 to 300 m sec.4 mm eye pupil diameter is the diameter of maximum visual acuity. Amplitude of accommodation or defocus of eye is 0 to 5 diopters for an age group of up to 60 years age. The eye exhibits positive spherical aberration when it sees distant object, negative spherical aberration for near objects and zero spherical aberration for an object at 50 cms. The chromatic resolving power of eye is about 3.0 A. U The light gathering power of day sight is 40 mmx40mm/5mmx5mm which is 64 times the light gathering power of eye. On the special marks of the reticle at the centre of the image, the observer sees the angular dimensions of tank at 4000 meter ranger as 0.6 m. rad. Length and 1.5m.rad. Width. The pilot of the helicopter sees the terrain with a naked eye and the selected sectors of terrain is seen through day sight for recognition of the tank targets at 4000m range.

- **Comments on the aberration data**


The astigmatism is somewhat beyond the tolerance at the edge of the field and rapidly converges to tolerance value at about 0.7071 field for that reason it is considered acceptable. The eye can tolerate 2.0 diopters of astigmatism in visible sights like direct view optics which is the present case. Suitably designed reticle takes care of distortion in the sight. The sight is better corrected for aberrations than the resolution requirements for of 4 cycles across front end view of 2.3mx2.3m or side view of 2.3mx5.3m of a combat tank target .The optical characteristics of the articulated day sight is shown in table 3.

**Table 3 The optical characteristics of the articulated optical day sight.**

PARAMETER	VALUE
Focal length of optical assembly 1	196.87 mm
Focal length of optical assembly 2	20.0 mm
Magnification	9.85
Full field – of – view	4 <sup>0</sup> x6 <sup>0</sup>
Apparent field – of- view	39.4 <sup>0</sup> x59.1 <sup>0</sup>
Entrance pupil diameter	40.0 mm

Exit pupil diameter	4.0 mm
Eye relief	16.64 mm
Physical dimensions	430.0 mmX239.0mmX252.0mm

The articulated optical day sight is configured with the above six optical assemblies using front coated plane mirrors and Penta prism at appropriate locations in the optical paths of optical assemblies. The optical path of the sight in the three Cartesian coordinate axes directions are shown in figures 3 to 8 and the optical design data are shown in Tables 4 to 8.

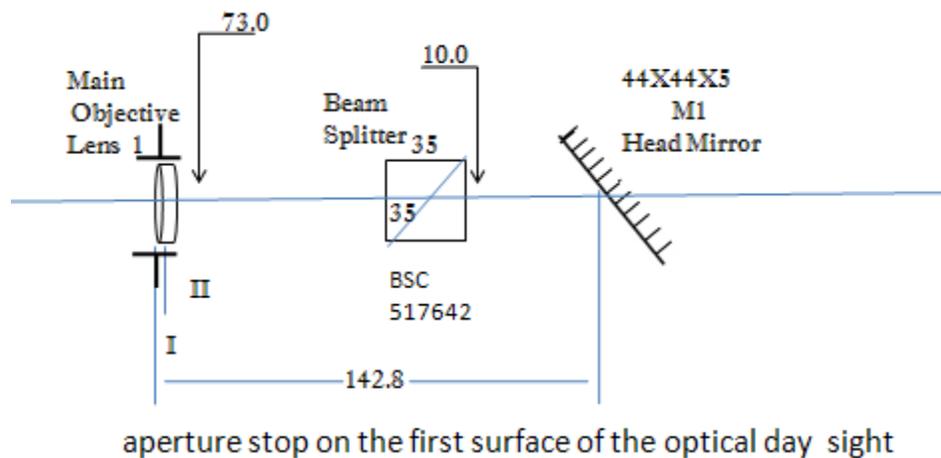

aperture stop on the first surface of the optical day sight

Figure 3: Optical path 1 along x-axis above the helicopter roof. The drawing is not to the scale.

Table4: optical design data of Optical path 1 along x-axis above helicopter roof

LENS	GLASS	R1	R2	R3	CT	CA
I	BSC 517642	102.4 VEX	120.96 VEX		8.7	40.0
II	EDF 648338		120.96 CAV	1281.37 CAV	3.1	40.0

ALL THE DIMENSIONS ARE IN mm

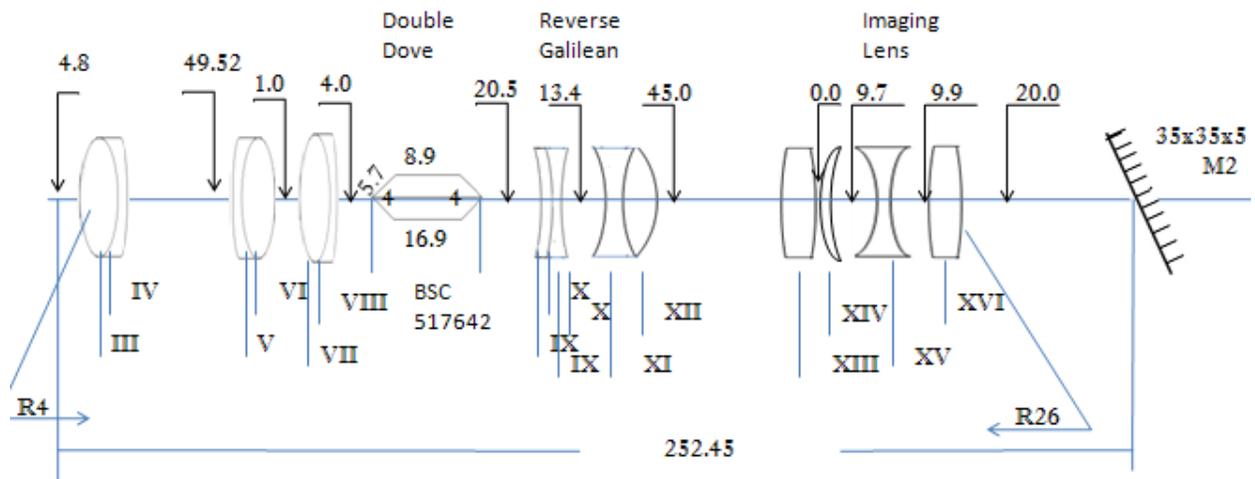


Figure 4: Optical path 2 along Y –axis above the helicopter roof .The drawing is not to the scale.

Table5(a): optical design data of Optical path 2 along Z –axis above the helicopter roof

LENS	GLASS	R4	R5	R6	R7	R8	R9	R10	R11	R12	CT	CA
III	BSC 517642	87.65 VEX	220.4 VEX								9.7	27.8
IV	EDF 648338		220.4 CAV	358.8 CAV							3.5	27.8
V	DEDF 717295				900.0 VEX	60.0 CAV					4.0	12.0
VI	DBC 620603					60.0 VEX	54.0 VEX				8.0	12.0
VII	DBC 620603							54.0 VEX	60.0 VEX		8.0	12.0
VIII	DEDF 717295								60.0 CAV	300.0 VEX	3.5	12.0

ALL THE DIMENSIONS ARE IN mm

Table5(b): optical design data of Optical path 2 along Z –axis above the helicopter roof


LENS	GLASS	R13	R14	R15	R16	R17	R18	CT	CA
IX	SF61 751275	490.0 CAV	26.71 VEX					5.4	10.8
X	F6 636353		26.71 CAV	34.87 CAV				3.0	10.8
XI	F7 625356				1326.26 CAV	29.16 CAV		9.27	25.2
XII	LAF 744448					29.16 VEX	50.0 VEX	10.0	25.2

ALL THE DIMENSIONS ARE IN mm

Table5(c): optical design data of Optical path 2 along Z –axis above the helicopter roof

LENS	GLASS	R19	R20	R21	R22	R23	R24	R25	R26	CT	CA
XIII	DBC 607595	60.0 VEX	550.0 VEX							10.0	28.4
XIV	DBC 607595			34.19 VEX	46.24 CAV					7.9	28.0
XV	SF12 728284					150.38 CAV	26.49 CAV			3.5	24.0
XVI	LAC 734517							58.0 VEX	47.81 VEX	17.36	32.6

ALL THE DIMENSIONS ARE IN mm

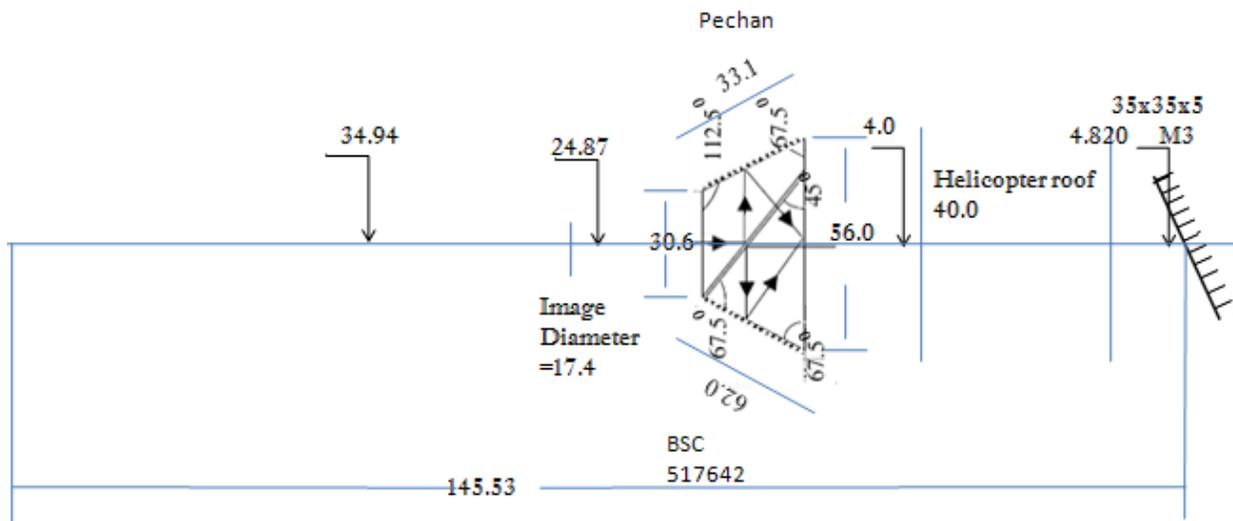

ALL THE DIMENSIONS ARE IN mm

Figure5 : Optical path 3 along Y – axis below the helicopter roof . The drawing is not to the scale.

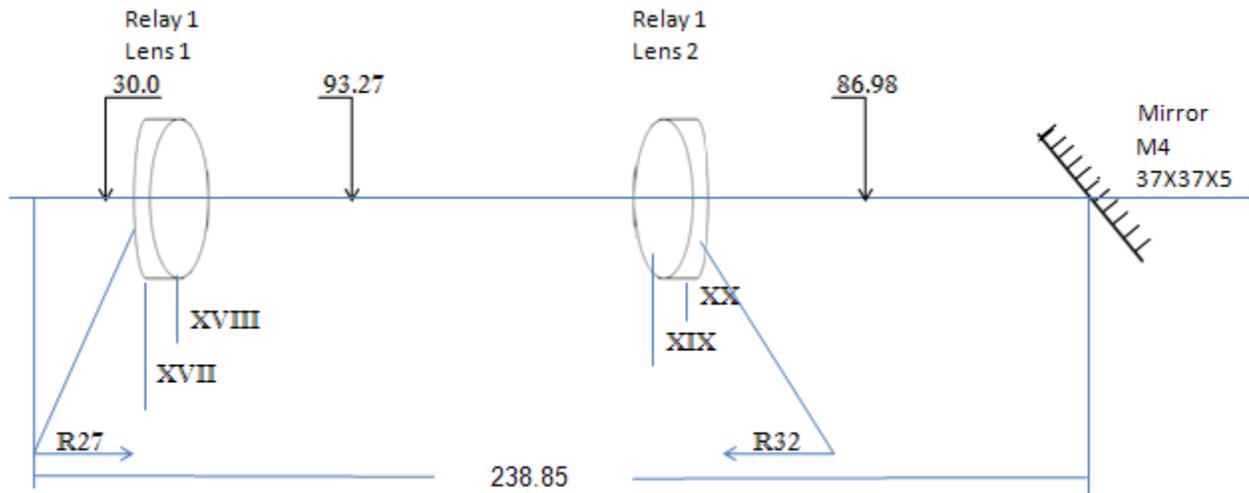


Figure6 : Optical path 4 along X – axis below the helicopter roof .

Table6: optical design data of Optical path4 along X – axis below the helicopter roof .

LENS	GLASS	R27	R28	R29	R30	R31	R32	CT	CA
XVII	SF12 648338	82.95 VEX	33.58 CAV					1.86	30.0
XVIII	HC 524592		33.53 CAV	134.6 VEX				12.44	30.0
XIX	SF12 648338				134.68 VEX	34.82 VEX		12.44	30.0
XX	SF12 648338					34.82 CAV	74.62 VEX	1.86	30.0

ALL THE DIMENSIONS ARE IN mm

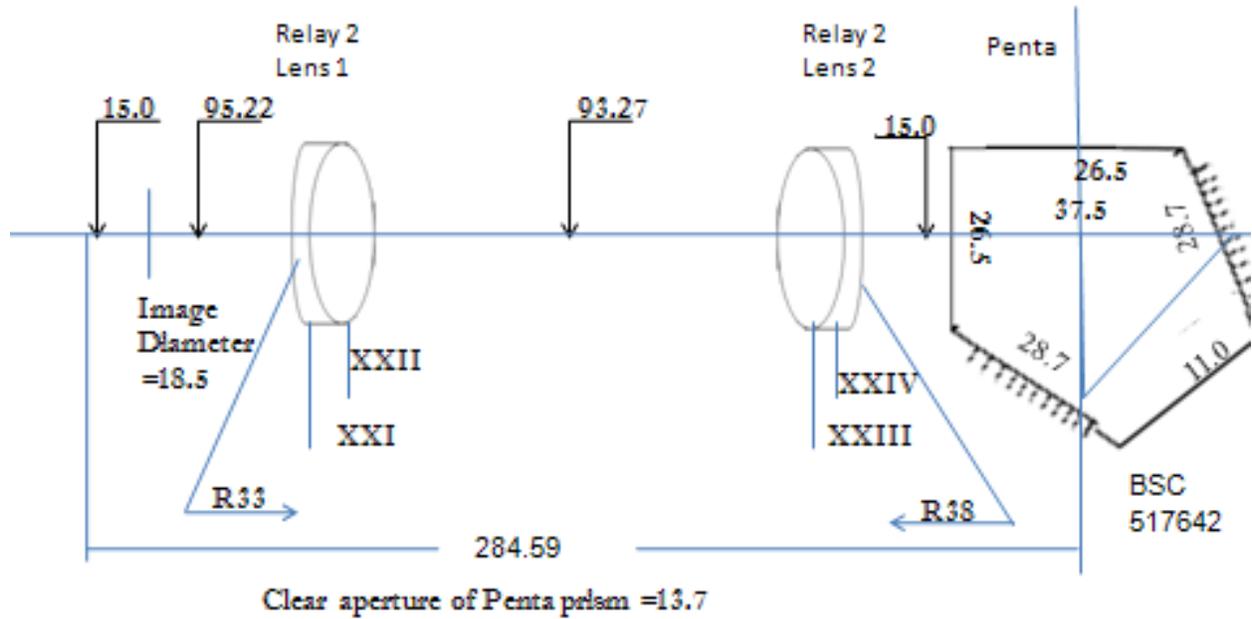


Figure 7: Optical path 5 along Y –axis below the helicopter roof . The drawing is not to the scale.

Table 7: optical design data of Optical path 5 along Y –axis below the helicopter roof .

LENS	GLASS	R33	R34	R35	R36	R37	R38	CT	CA
XXI	SF12 648338	82.95 VEX	33.52 CAV					1.86	5.2
XXII	HC 524592		33.53 CAV	134.68 VEX				12.44	5.2
XIII	HC 524592				134.68 VEX	34.82 CAV		12.44	12.0
XXIV	SF12 648338					34.82 VEX	74.62 VEX	1.86	12.0

ALL THE DIMENSIONS ARE IN mm

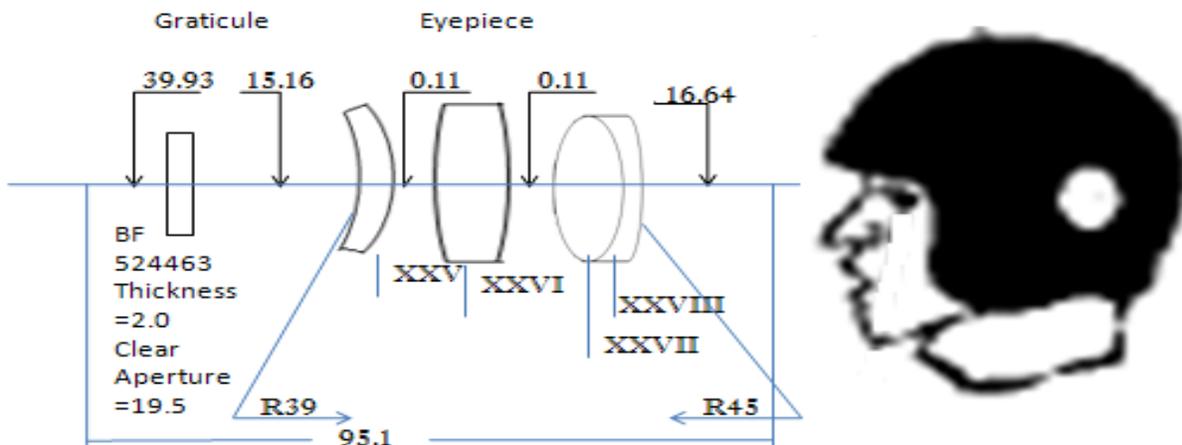


Figure 8: Optical path 6 along x –axis towards observer eye below the helicopter roof. The drawing is not to the scale.

Table 8: optical design data of Optical path 6 along x –axis towards observer eye below the helicopter roof

LENS	GLASS	R39	R40	R41	R42	R43	R44	R45	CT	CA
XXV	DBC 620603	239.73 VEX	26.85 VEX						5.22	20.0
XXVI	DBC 620603			107.18 VEX	44.54 VEX				5.33	17.7
XXVII	DBC 620603					28.76 VEX	28.76 VEX		9.27	16.0
XXVII	SF 18 722293						28.76 CAV	57.11 VEX	1.34	16.0

ALL THE DIMENSIONS ARE IN mm

### 7.0 CONCLUSIONS

The optical configuration and optical design data of optical day sight with articulation of +120 deg to -120 deg in azimuth and articulation of +20 deg to -10 deg in elevation for military helicopter application is presented. The sight is configured in volume space of 550mm x 300mm x 200mm. The optical path of sight is folded in all the three Cartesian coordinate directions. The sight acquires military tank targets at a range of 4 Kilometers in all day light conditions on Indian terrain. The optical transmittance of sight is 25 percent on –axis and 60 percent of 25 percent on .off-axis with all optical components coated with single antireflection coating. A transmittance of 10 percent is required for recognition of frontal view of tank having contrast of 10 percent. This helicopter mounted day sight met all the requirements to recognize the tank target on Indian terrains. This is entirely a novel compact and complex

optical configuration folded in three Cartesian coordinate directions for articulated panoramic direct view day sight for helicopter application. There is no such sight so far reported in patents and text book literature to my knowledge.

## REFERENCES

1. Cox. A "A System of Optical Design ", Focal Press, London, p 606, 1964.
2. Bruce H. Walker, Optical Engineering Fundamentals Second Edition, SPIE Press, Wasington , Chapter 4 on Thin Lens Theory, pp47-76,2008.
3. Handbook of Optical Systems Vol3.Aberration Theory and Correction of Aberrations. Edited by Herbert Cross, Wiely-VCH Verlag GmbH & Co, Weinheim, Chapter 29, 2007.
4. A.E. Conrady, Applied Optics and Optical Design Part 2, Dover Publication, New York,.pp640-661,1960.
5. Rudolf Kingslake and R. Barry Johnson, Lens Design Fundamentals,pp318-322,Elsevier,Oxford,2010
6. Donald. H. Jacobs, Fundamentals of Optical Engineering, McGraw Hill, New York.pp381-389,1943.
7. W. J. Smith ," Modern Optical Engineering ", McGraw-Hill. Inc., New York.. pp 272-278; pp247-256; pp300-302; pp324-325,1966.
8. Daniel Malacara, Zacaris Malacara, Handbook of Optical Design. Second Edition, Marcel DeckerInc., NewYork Chapter 12, 2004.