INTERNATIONAL JOURNAL OF PURE AND APPLIED RESEARCH IN ENGINEERING AND TECHNOLOGY

A PATH FOR HORIZING YOUR INNOVATIVE WORK

SPECIAL ISSUE FOR INTERNATIONAL LEVEL CONFERENCE "ADVANCES IN SCIENCE, TECHNOLOGY & MANAGEMENT" (IC-ASTM)

BANANA PEEL: A PROMISING ADSORBENT FOR WASTEWATER TREATMENT

PRANAV D. PATHAK[1], SANJAY BHAGAT[2]

1. Pacific School of Engineering, Surat, Gujarat
2. Padmabhooshan Vasantraodada Patil Institute of Technology, Budhgaon, Sangli, Maharashtra

Accepted Date: 05/09/2017; Published Date: 10/10/2017

Abstract: Banana peel (BP) wastes are a usually produced organic waste from both food-processing industries and household's utilizations. However, BP is low-cost lignocellulosic materials that have some possibilities for reutilization. For its specific reutilization, the characterization of BP is necessary. In this respect, this study presents a detailed physicochemical characterization of BP. The BP was characterized by various properties such as surface charges, point of zero charge, surface pH, BET surface area SEM and FTIR. The BET surface areas of BP were found 0.68 m2/g. Point of zero charge and surface pH of BP were in the basic range. The surface of BV is unequal and bumpy with some pores. The findings of this study offer an understanding of BP properties and serve as a model to propose their potential applications as a low-cost biosorbent.

Keywords: Swarm Intelligence, Hive, Piping, Quorum.

Corresponding Author: PRANAV D. PATHAK

Co Author: - SANJAY BHAGAT

Access Online On:

www.ijpret.com

PAPER-QR CODE

How to Cite This Article:

Pranav D. Pathak, IJPRET, 2017; Volume 6 (2): 93-99

INTRODUCTION

India is gifted with a diverse agricultural climate, which is extremely boosting for cultivating a large number of crops such as fruits, vegetables, ornamental, aromatic plants, medicinal herbs, spices and plantation corps. India is second largest producer of fruits and vegetables all over the globe. A huge amount of biomass is formed every year during cultivation, harvesting, processing and consumption of agricultural products. This biomass can be utilized for different applications like a low cost biosorbent, feedstock for producing biochemical and biofuels and substrate for the production of enzymes and metabolites [1, 2].

Banana (Musaceae) is a tropical fruit harvested all over the year. Banana is world's second major harvested fruit contributing about 16% of total fruit production. India contributes about 27% of biosphere's banana production. The average weight of fruit is about 125 g. Banana peel (BP) founds about 30-40% (w/w) of fresh banana. The main elements of BP are cellulose, hemicellulose, pectin, chlorophyll, and other low molecular weight compounds [3-7]. In 2012, approximately 101,992,743 tons of bananas were harvested throughout the world (FAO, 2013).

This huge amount of waste produced has given rise to the new problem of solid-waste management and its safe disposal. Landfills have been the collective method of BP waste disposal, but in some cases, open burning is preferred. However, these methods of BP disposal cause serious environmental problems. From an environmental viewpoint, it is essential to reuse BP. This would help decrease the load on ecosystem and contribute to the world economy.

These paper reports physicochemical and surface characteristics of BP. Characterizations were done using gravimetric, titrimetric, potentiometric, and instrumental techniques. This exercise helps in getting the insight of BP and serves as baseline information to propose their potential application as an adsorbent.

Chacterization of BP:

Proximate and ultimate analysis of BP was done and properties like point of zero charge, surface pH, surface charges, BET surface area were determined. FP were further characterized by techniques such as SEM and FTIR.

The analysis of dry BP shows that it contains of moisture (9.65%), ash (5.01%), volatile matter (85.26), C (40.24%), H (6.14%), N (1.38%) and S (0.098%). The proximate analysis approves high energy potential of BP (Carbon: 40%; LOI: 94 %;). The XRF analysis reveals that BP contains Al, Cl, Na, Si, and traces of some metal elements. The high loss on ignition of BP specifies that the volatile matter is present in huge amounts. Ripe BP contains upto crude protein; 8%; ether extract:6.2%;soluble sugars: 13.8% and total phenolic compounds: 4.8% [8].

zero-charge point (pHpzc) is a very valuable parameter in adsorption studies. It gives an idea about the interactions of adsorbent surface with the adsorbate. The pHpzc of BP corresponds to pH value of 5.36 of solution. Also, the concentrations of basic sites (4.9 mmol g-1) are more than acidic sites (0.75 mmol g-1). Along with this the surface pH of BP was found to be 6.68. Due to this, the BP can be classified as an adsorbent with a basic character. Additionally, the surface area was determined by BET method. Its value was 0.65 m^2g^{-1} [8].

From SEM image (Figure 1) it was clear that the particles of BP are irregular in shape and its surface shows a micro-rough texture. There may be pores are present which are significantly minor than can be observed in a typical SEM and that such micropores/mesopores might responsible for the surface area available for adsorption [8].

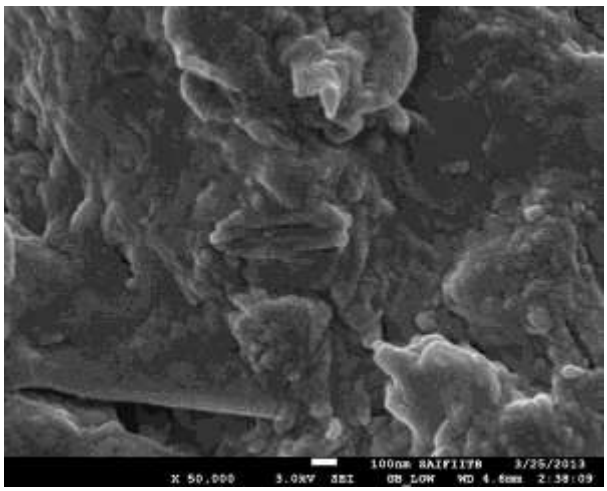

Figure1: SEM of BP

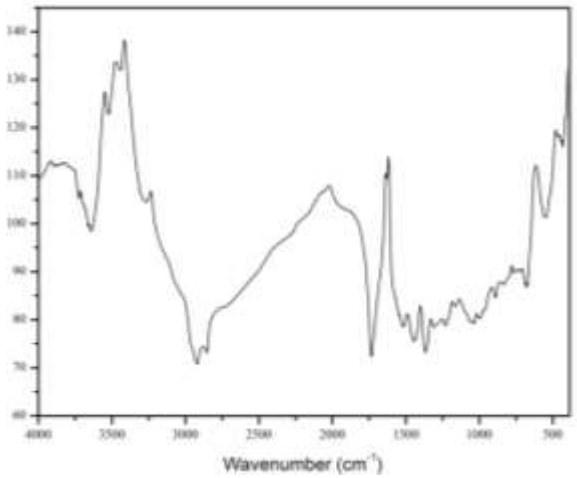

Figure2: FTIR of BP

FTIR spectrum was carried out to identify the functional groups present on BP surface. FTIR (Figure 2) spectrum broadly confirms presence of amines, amino acids, phenol, alcohol, alkanes, alkyl halide, carboxylic acid, aromatic in BP.

According to these findings BP can be a low-cost adsorbent to uptake acid molecule from aqueous solution [9].

BP as an Adsorbent:

We envisaged the possible use of BP as a biosorbent after carrying out various physicochemical characterization studies. The surface properties of BPs specifies that BP have more basic sites, low BET surface area, and different functional groups are present with rough and porous surface. This combination of properties makes it suitable as a biosorbent. For example, adsorption of heavy metals, dyes, and organic pollutants from aqueous solutions on BP had shown promising results. Due to this purpose, BP can be used in its natural or modified form, or as activated carbon [7, 10]. The detailed literature available for BP as an adsorbent is listed in Table 1.

Table 1: BP as an adsorbent for removal of heavy metals, dyes, and organic pollutants

Adsorbate	Activation process/agent	Qm (mg/g)	% R	T (min)	pH	Reference
Cr^{3+}	Esterified BP	115.43	95	30	4	[11]
Cr^{6+}	-	131.56	95	30	2	[12]
Cr^{6+}	-	2.73	95	15	6	[13]
Cu^{2+}	-	20.97	98	20	3	[14]
Pb^{2+}		41.44				
Cd	-	20.88	73.15	1440	5	[15]

Cd	Esterified peel	35.52	97	30	8	[16]
Cu	-	0.9±0.2	-	120	-	[17]
	Rapid explosion with supercritical CO2	-		120	5	
	Bioactive compounds extracted using supercritical CO2	0.38 ± 0.05		1200	5	
Methylene blue	-	106.95	93.44	60	4-8	[18]
	0.1 N NaOH	332.23	98.54			
Acid blue 25	0.1 M HCl	89.52	-	-	2	[19]
Phenolic compounds	-	688.9	96	180	7	[20]
Benzoic acid	-	6.62	77.59	720	3.68	[7]
Salicylic acid	-	9.80	61.55	840	3.3	
Citric acid	-	76.13	85.27	360	4.75	[21]
Citric acid	Microwave treated	147.06	88.43	360	4.75	
Cu	-	8.24	81.2	600	6.48	[22]
Pb^{2+}	-	5.71	85.3	-	5	[5]
Cd^{2+}		2.18	89.2		3	
Methyl orange	-	21.0	-	65	6–7	[23]
Methylene blue		20.8				
Rhodamine B		20.6				
Congo red		18.2				
Methyl violet		12.2				
AmidoBlack 10B		6.5				
Pb^{2+}	-	50.45	-	300	5	[24]
	NaOH	469.42				
	HCl	49.77				
	H_3PO_4	71.12				

Cu^{2+}	-	52.36	-	1500	-	[25]
Pb^{2+}		25.91				
Zn^{2+}		21.88				
Ni^{2+}		54.35				
Cd^{2+}		34.13				
Cu^{2+}	Cellulose extracted	140.85				
Pb^{2+}		101.01				
Zn^{2+}		104.17				
Ni^{2+}		133.33				
Cd^{2+}		76.92				
Au^{3+}	-	198.31	17.23	30	2.5	[26]
	Carbonated at 300°C for 4 hours	692.37	60.34			
	Carbonated at at 500°C for 4 hours	801.70	69.86			
	Carbonated at at 700°C for 4 hours	71.19	6.20			
Atrazine	-	-	93.8	1440	-	[4]
Ametryne			95.2			

CONCLUSION:

This paper presents the physicochemical properties of BP in detail with the aim to get an in-depth understanding of BP and its possible reutilization as an adsorbent. The surface pH and pH_{pzc} of BP recommends that BP contain more number of basic groups. The BET surface area of BP is low, but its surface is uneven and lumpy with some pores. The results from FTIR confirm the presence of different functional groups such as amines, amino acids, phenol, carboxylic acid, alkanes, alcohol, and aromatic alkyl halide in BP. This physicochemical characterization enables the reutilization of FVP as a low-cost adsorbent.

REFERENCES:

1. Midha, S., Horticulture Statistics In India. 12: Horticulture Statistics in India, 2012: p. 148-161.

2. Palma, C., et al., Eco-friendly Technologies Based on Banana Peel Use for the Decolourization of the Dyeing Process Wastewater. Waste Biomass Valorization, 2011. 2: p. 77–86.

3. Wadhwa, M. and M.P.S. Bakshi, Utilization of fruit and vegetable wastes as livestock feed and as substrates for generation of other value-added products, H.P.S. Makkar, Editor. 2013/14, Food and Agriculture Organization of the United Nations (FAO).

4. Silva, C.R., et al., Banana peel as an adsorbent for removing atrazine and ametryne from waters. Journal of Agriculture and Food Chemistry, 2013. 61(10): p. 2358-2363.

5. Anwar, J., et al., Removal of Pb(II) and Cd(II) from water by adsorption on peels of banana. Bioresource Technology, 2010. 101(6): p. 1752-1755.

6. Mohapatra, D., S. Mishra, and N. Sutar, Banana and its by-product utilization: an overview. Journal of Scientific & Industrial Research, 2010. 69: p. 323-329.

7. Pathak, P.D., S.A. Mandavgane, and B.D. Kulkarni, Valorization of banana peel: a biorefinery approach. Rev Chem Eng, 2016 30(6): p. 651–666.

8. Pathak, P.D., S.A. Mandavgane, and B.D. Kulkarni, Utilization of banana peel for the removal of benzoic and salicylic acid from aqueous solutions and its potential reuse. Desalination and Water Treatment, 2015: p. 1-8.

9. Pathak, P.D., S.A. Mandavgane, and B.D. Kulkarni, Characterizing fruit and vegetable peels as bioadsorbents. Current Science, 2016. 110(11): p. 2114-2123.

10. Pathak, P.D., S.A. Mandavgane, and B.D. Kulkarni, Fruit peel waste as a novel low-cost bio adsorbent. Reviews in Chemical Engineering, 2015. 31(4): p. 361–381.

11. Memon, J.R., et al., Banana Peel: A Green and Economical Sorbent for Cr(III) Removal. Pakistan Journal of Analytical and Environmental Chemistry, 2008. 9(1): p. 20 – 25.

12. Memon, J.R., et al., Banana peel: a green and economical sorbent for the selective removal of Cr(VI) from industrial wastewater. Colloids Surf B Biointerfaces, 2009. 70(2): p. 232-237.

13. Khanam, A.S. and U.N. Murthy, Experimental Study on Biosorption of Cr(VI) from Water by Banana Peel Based Biosorbent. Research and Reviews: Journal of Engineering and Technology, 2013. 2(3 (Supplimentary)): p. 201-204.

14. Castro, R.S.D., et al., Banana Peel Applied to the Solid Phase Extraction of Copper and Lead from River Water: Preconcentration of Metal Ions with a Fruit Waste. Industrial & Engineering Chemistry Research, 2011. 50(6): p. 3446-3451.

15. Saikaew, W. and P. Kaewsarn, Cadmium ion removal using biosorbents derived from fruit peel wastes. Songklanakarin Journal of Science and Technology 2009. 31(5): p. 547-554.

16. Memon, J.R., et al., Characterization of banana peel by scanning electron microscopy and FT-IR spectroscopy and its use for cadmium removal. Colloids Surf B Biointerfaces, 2008. 66(2): p. 260-265.

17. Albarellia, J.Q., et al., Effects of supercritical carbon dioxide on waste banana peels for heavy metal removal. The Journal of Supercritical Fluids, 2011. 58(3): p. 343-351.

18. Amel, K., M.A. Hassena, and D. Kerroum, Isotherm and Kinetics Study of Biosorption of Cationic Dye onto Banana Peel. Energy Procedia, 2012. 19: p. 286-295.

19. Guiso, M.G., et al., Adsorption of the Prototype Anionic Anthraquinone, Acid Blue 25, on a Modified Banana Peel: Comparison with Equilibrium and Kinetic Ligand−Receptor Biochemical Data. Industrial & Engineering chemistry research, 2014. 53: p. 2251−2260.

20. Achak, M., et al., Low cost biosorbent "banana peel" for the removal of phenolic compounds from olive mill wastewater: kinetic and equilibrium studies. Journal of Hazardous Materials 2009. 166(1): p. 117-125.

21. Pathak, P.D. and S.A. Mandavgane, Preparation and characterization of raw and carbon from banana peel by microwave activation: Application in citric acid adsorption. Journal of Environmental Chemical Engineering, 2015. 3(4A): p. 2435–2447.

22. Liu, C., et al., Optimal conditions for preparation of banana peels, sugarcane bagasse and watermelon rind in removing copper from water. Bioresource Technology, 2012. 119: p. 349-154.

23. Annadurai, G., R.-S. Juang, and D.-J. Lee, Use of cellulose-based wastes for adsorption of dyes from aqueous solutions. Journal of Hazardous Materials B, 2002. 92: p. 263–274.

24. Massocatto, C.L., et al., Preparation and evaluation of kinetics and thermodynamics studies of lead adsorption onto chemically modified banana peels. Desalination and Water Treatment, 2013. 51: p. 5682–5691.

25. Thirumavalavan, M., Y.-L. Lai, and J.-F. Lee, Fourier Transform Infrared Spectroscopic Analysis of Fruit Peels before and after the Adsorption of Heavy Metal Ions from Aqueous Solution. Journal of Chemical & Engineering Data, 2011. 56(5): p. 2249-2255.

26. Zheng, H. and L. Wang, Banana Peel Carbon Containing Functional Groups Applied to the Selective Adsorption of Au(III) from Waste Printed Circuit Boards. Soft Nanoscience Letters, 2013. 3: p. 29-36.